# FRATER®

SPAIN SINCE 1999

ECO

FRATER®
SPAIN SINCE 1999
ECO

# LIGHT UP THE CITY

GPX-C
FUJI

CCT: 3000K/4000K/6500K
IP40, CRI 80Ra, Ambient
Temperature: -10 to +45 °C

# Backlit Panel Eco

- Extruded aluminum frame, Soft and uniform light distribution
- High Luminous Efficacy
- Rated lifetime: 30,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FEBPES-048 | 36-40-48W | 100 | Up to 4800 | 595x595x26 |

## Backlit Panel Matrix IP20

| | | | | |
|---|---|---|---|---|
| FEBLM48A6060 | 48W | 100 | 4800 | 600x600x26 |

CCT: 6500K
IP40, CRI 80Ra, Ambient
Temperature: 0 to +45 °C

# Grille Light Super

- Steel Housing and PC Diffuser, Soft and uniform light distribution
- High Luminous Efficacy
- Rated lifetime: 30,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FEGLS96A6060 | 96W | 100 | 9600 | 595x595x30 |

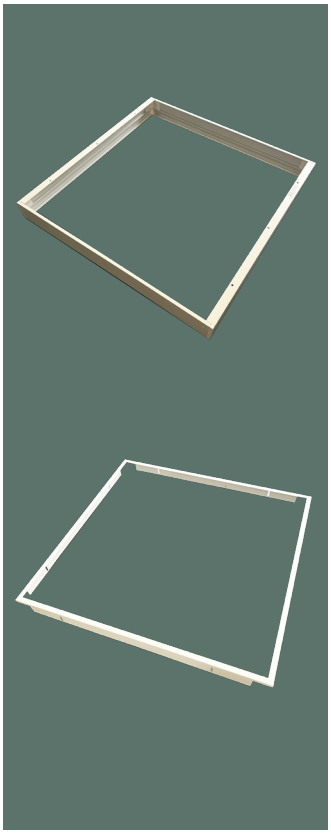

# Frames for LED Panels

- Innovative design , Clip-in Easy Installation

**PRODUCT VARIANTS**

### A. Recessed Mounted Frames

| Model# | Description | Dimension |
|---|---|---|
| FETRPF6060 | Recessed Frame Push Type | 600x600 |
| FETRPF1230 | Recessed Frame Push Type | 1200x300 |
| FETRPF1260 | Recessed Frame Push Type | 1200x600 |
| FETRGF6060 | Recessed Gypsum Ceiling Frame | 600x600 |
| FETRGF1230 | Recessed Gypsum Ceiling Frame | 1200x300 |
| FETRGF1260 | Recessed Gypsum Ceiling Frame | 1200x600 |

### B. Surface Mounted Frames

| Model# | Description | Dimension |
|---|---|---|
| FETSCF6060 | Surface Mounted Clip Frame | 600x600x65 |
| FETSCF1230 | Surface Mounted Clip Frame | 1205x300x65 |
| FETSCF1260 | Surface Mounted Clip Frame | 1200x600x65 |

CCT: 3000K/4000K/6500K
IP20, CRI 80Ra, Ambient Temperature: 0 to +45 °C
White/ Black Finish.

## COB Downlight, Virgo Series

- PP material qualify in glow wire test @650 °C
- High Luminous Efficacy, Rated lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension | Cutout |
|---|---|---|---|---|---|
| FEDL5WVIR | 5W | 70 | 350 | 70x28 | 55 |
| FEDL10WVIR | 10W | 80 | 800 | 96x34 | 85 |
| FEDL20WVIR | 20W | 90 | 1800 | 170x38 | 145 |
| FEDL30WVIR | 30W | 100 | 3000 | 225x38 | 190 |

CCT: 4000K/6500K
IP40, CRI 80Ra, Ambient Temperature: -10 to +45 °C

## COB Downlight, Libra Series

- Die-Cast Aluminum + Glass Diffuser
- High Luminous Efficacy, Rated lifetime: 30,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension | Cutout |
|---|---|---|---|---|---|
| FEDL20WLIB | 20W | 95 | 1900 | 195x60 | 175 |
| FEDL30WLIB | 30W | 95 | 2850 | 223x63 | 198 |
| FEDL40WLIB | 40W | 95 | 3800 | 223x63 | 200 |

CCT: 4000K/6500K
IP44, CRI 80Ra, Ambient Temperature: 20 to +45 °C

## Downlight, Infinity Series

- High Light Transmittance and Even Light Distribution
- Built-in Drvier, PA6/PC Base + PC Cover, Rated lifetime: 30,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension | Cutout |
|---|---|---|---|---|---|
| FEDL20WINF | 20W | 100 | 2000 | 174x69 | 144 |
| FEDL26WINF | 26W | 100 | 3000 | 244x85 | 200 |

CCT: 3000K/4000K/6500K
IP40, CRI 80Ra, Ambient
Temperature: -10 to +45 °C

## Slim Panel Downlight: Eternal Series, Recess Round

- PP material qualify in glow wire test @650 °C
- High Luminous Efficacy, Rated lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension | Cutout |
|---|---|---|---|---|---|
| FEDLERRP04A | 4W | 85 | 340 | 98x25.5 | 75-80 |
| FEDLERRP06A | 6W | 85 | 510 | 118x25.5 | 95-100 |
| FEDLERRP09A | 9W | 85 | 765 | 143.5x24.5 | 118 |
| FEDLERRP15A | 15W | 85 | 1275 | 173.5x26.5 | 145 |
| FEDLERRP20A | 20W | 85 | 1700 | 220x26.5 | 190 |
| FEDLERRP26A | 26W | 85 | 2210 | 295x26.5 | 265 |

CCT: 3000K/4000K/6500K
IP40, CRI 80Ra, Ambient
Temperature: -10 to +45 °C

## Slim Panel Downlight: Eternal Series, Recess Square

- PP material qualify in glow wire test @650 °C
- High Luminous Efficacy, Rated lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension | Cutout |
|---|---|---|---|---|---|
| FEDLERSP06A | 6W | 85 | 510 | 119x119x25.5 | 95 |
| FEDLERSP10A | 10W | 85 | 850 | 143x143x26 | 115 |
| FEDLERSP16A | 16W | 85 | 1360 | 173x173x26 | 140 |
| FEDLERSP20A | 20W | 85 | 1700 | 219x219x27 | 190 |
| FEDLERSP26A | 26W | 85 | 2210 | 295x295x28 | 260 |

CCT: 3000K/4000K/6500K
IP40, CRI 80Ra, Ambient
Temperature: -10 to +45 °C

## Slim Panel Downlight: Eternal Series, Surface Round

- PP material qualify in glow wire test @650 °C
- High Luminous Efficacy, Rated lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FEDLESRP06A | 6W | 85 | 510 | 123x35 |
| FEDLESRP12A | 12W | 85 | 1020 | 175x35 |
| FEDLESRP18A | 18W | 85 | 1530 | 225x35 |
| FEDLESRP26A | 26W | 85 | 2210 | 295x35 |

CCT: 3000K/4000K/6500K
IP40, CRI 80Ra, Ambient
Temperature: -10 to +45 °C

## Slim Panel Downlight: Eternal Series, Surface Square

- PP material qualify in glow wire test @650 °C
- High Luminous Efficacy, Rated lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FEDLESSP06A | 6W | 85 | 510 | 169x169x35 |
| FEDLESSP12A | 12W | 85 | 1020 | 169x169x35 |
| FEDLESSP18A | 18W | 85 | 1530 | 223x223x35 |
| FEDLESSP24A | 24W | 85 | 2040 | 294x294x35 |

CCT: 4000K/6500K
IP20, CRI 80Ra, Ambient
Temperature: 0 to +45 °C

## Mirror Light, Argo Series

- PC Opal Diffuser, PC Body, Soft and uniform light distribution
- High Luminous Efficacy, Rated lifetime: 30,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FEMR15WARGO | 15W | 90 | 1350 | 600x22x38 |

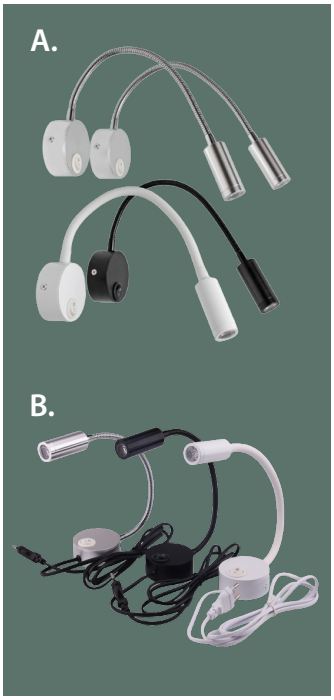


CCT: 3000K/4000K/6000K
IP20, CRI 80Ra, Ambient
Temperature: 0 to +45°C

## Wall Light - DreamBeam Series

- Easy to Install and Maintain
- On / Off Switch
- Narrow Beam Angle 30°
- Modern Design
- Rated lifetime: 20,000 hours
- Color: Black / White / Silver

**PRODUCT VARIANTS**

| Model# | Wattage | Lumen | Dimension |
|---|---|---|---|
| FEWLDB-03A | 3W | 80 | Head: ∅57x60mm<br>Base: ∅ 64x28mm<br>Hose: ∅8x300mm |
| FEWLDB-03B | 3W | 80 | |

B.Connected to 1.8m wire

CCT: 3000K/4000K/6500K
IP20, CRI 80Ra, Ambient
Temperature: 0 to +45 °C

## Weatherproof Luminaire, WP T8 Series

• Transparent PC Diffuser, PC housing, SS clips, High Luminous Efficacy
• Lamp: Replaceable LED T8 Tubes, Rated lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FEWPT8XL118A | 1x10W | 110 | 1100 | 671x68x60 |
| FEWPT8XL218A | 2x10W | 110 | 2200 | 655x107x57 |
| FEWPT8XL136A | 1x18W | 110 | 1980 | 1286x68x60 |
| FEWPT8XL236A | 2x18W | 110 | 3960 | 1265x107x55 |
| FEWPT8XL158A | 1x24W | 110 | 2640 | 1580x68x60 |
| FEWPT8XL258A | 2x24W | 110 | 5280 | 1565x108x55 |

CCT: 3000K/4000K/6500K
IP40, CRI 80Ra, Ambient
Temperature: 0 to +45 °C

## Ceiling Light, Mushroom Eco

• Steel Housing and PC Diffuser, Soft and uniform light distribution
High Luminous Efficacy
• Rated lifetime: 30,000 hours.

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FECL14WMUS | 14W | 85 | 1190 | 300x78 |
| FECL14WMUS | 20W | 85 | 1700 | 300x78 |

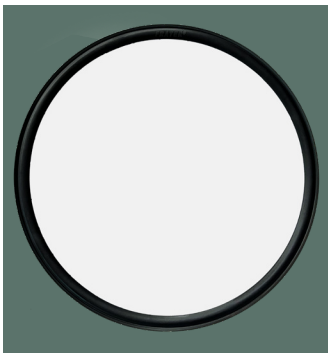

CCT: 6500K
IP40, CRI 80Ra, Ambient
Temperature: 0 to +45 °C

## Ceiling Light, Bright Series

• PC frame, Soft and uniform light distribution High Luminous Efficacy
• Rated lifetime: 20,000 hours, Black / White Frame.

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FECL20WBTS | 20W | 70 | 1400 | 260x53 |
| FECL40WBTS | 40W | 70 | 2800 | 372x53 |

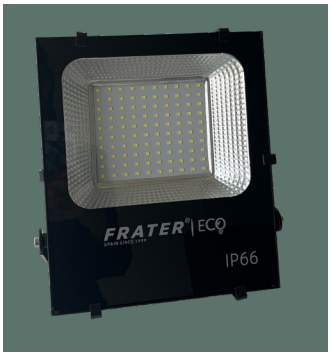


CCT: 3000K/4000K/6500K
IP66, CRI 80Ra, Ambient
Temperature: -20 to +50 °C

## Flood Light, Eco Series

• High Performance Thermal Management Design to Ensure Low LED Junction Temperature
• Die-cast Aluminum Body, Toughened Glass, Surface Installation
• Luminous Efficacy, Rated lifetime: 30,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FEFL05066A | 50W | 100 | 5000 | 240x210x51 |
| FEFL10066A | 100W | 100 | 10000 | 284x253x57 |
| FEFL15066A | 150W | 100 | 15000 | 343x310x68 |
| FEFL20066A | 200W | 100 | 20000 | 380x350x82 |
| FEFL30066A | 300W | 100 | 30000 | 422x380x85 |
| FEFL40066A | 400W | 100 | 40000 | 482x430x106 |

CCT: 3000K/4000K/6500K
IP65, CRI 80Ra, Ambient
Temperature: -20 to +50 °C

## Diamond Highbay, Eco Series

• High Performance Thermal Management Design to Ensure Low LED Junction Temperature
• Die-cast Aluminum Body, PC Lens, Surface / Suspended Installation
• High Luminous Efficacy, Rated lifetime: 30,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FEHB50CH16BA | 50W | 140 | 7000 | 234x124x182 |
| FEHB100CH16BA | 100W | 140 | 14000 | 256x178x182 |
| FEHB150CH16BA | 150W | 140 | 21000 | 295x178x182 |
| FEHB200CH16BA | 200W | 140 | 28000 | 343x178x185 |

CCT: 3000K/4000K/6500K
IP20, CRI 80Ra, Ambient
Temperature: -10 to +45 °C

## High Bay Circular, Transformer

• High Performance Thermal Management Design to Ensure Low LED Junction Temperature
• Die-cast Aluminum Body, PC Lens, Surface / Suspended Installation
• High Luminous Efficacy, Rated lifetime: 30,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FEHBUFO75WA | 75W | 100 | 7500 | 245x108 |



CCT: 4000K/6500K
IP20, CRI 80Ra, Ambient
Temperature: -10 to +45 °C

## T8 LED Tube, T8 Glass

- Glass Diffuser, Double End Input Design, High Luminous Efficacy.
- Rated lifetime: 20,000 hours.

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FETL9WT8G | 9W | 120 | 1080 | 28x590 |
| FETL18WT8G | 18W | 120 | 2160 | 28x1200 |
| FETL22WT8G | 22W | 120 | 2640 | 28x1500 |

CCT: 3000K/4000K/6500K
IP20, CRI 80Ra, Ambient
Temperature: -10 to +45 °C

## LED Bulb E27

- Aluminum Body, Opal PC Diffuser, E27 Base
- High Luminous Efficacy, Rated lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| BL9WA60E27A | 9W | 90 | 810 | 60x108 |
| BL12WA60E27A | 12W | 90 | 1080 | 60x112 |
| BL15WA70E27A | 15W | 90 | 1350 | 70x138 |

CCT: 2700K/6500K
IP20, CRI 80Ra, Ambient
Temperature: -10 to +45 °C

## LED Bulb T120 & T140

- Aluminum Heatsink, PC Opal Cover, E27 Base
- High Luminous Efficacy, Rated lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FEBL40WT120E27A | 40W | 90 | 3600 | 118x195 |
| FEBL50WT140E27A | 50W | 90 | 4500 | 140x221 |

CCT: 3000K/4000K/6500K
IP20, CRI 80Ra, Ambient
Temperature: -10 to +45 °C

## LED Bulb T37

- Polybutylene Body, Opal PC Diffuser, E27 Base
- High Luminous Efficacy, Rated lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FEBL10WT37A | 10W | 90 | 900 | 37x115 |

CCT: 2700K/6500K
IP20, CRI 80Ra, Ambient
Temperature: 0 to +45 °C

## LED Bulb MR16GU5

- Aluminum Heatsink, Glass Cover, GU5 Base
- High Luminous Efficacy, Rated lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FEMR16BL5WGU5A | 5W | 90 | 450 | 50x50 |
| FEMR16BL7WGU5A | 7W | 90 | 630 | 50x50 |

CCT: 2700K/4000K/6500K
IP20, CRI 80Ra, Ambient
Temperature: 0 to +45 °C

## LED Bulb MR16GU10

- Aluminum Heatsink, Glass Cover, GU10 Base
- High Luminous Efficacy, Rated lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FEMR16BL5WGU10A | 5W | 90 | 450 | 50x54 |
| FEMR16BL7WGU10A | 7W | 90 | 630 | 50x54 |

CCT: 2700K/6500K
IP20, CRI 80Ra, Ambient
Temperature: 0 to +45 °C

## LED Bulb C37 Tail

- Aluminum Heatsink, PC Cover, E14 Base
- High Luminous Efficacy, Rated lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FEBL5WC37TLA | 5W | 90 | 450 | 36.50x133 |
| FEBL7WC37TLA | 7W | 90 | 630 | 36.50x135 |

CCT: 2700K/6500K
IP20, CRI 80Ra, Ambient
Temperature: 0 to +45 °C

## LED Bulb C37 Tip

- Aluminum Heatsink, PC Cover, E14 Base
- High Luminous Efficacy, Rated lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FEBL5WC37TLA | 5W | 90 | 450 | 36x101 |
| FEBL7WC37TLA | 7W | 90 | 630 | 36x110 |



## LED Strip Light STRIP 101

- 8W/M, 50M Per Roll, RGB, 240V AC
- High Luminous Efficacy, Rated lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Cutting Length | Dimension |
|---|---|---|---|
| FESTR8WM101A | 8W/M | 1000mm | 50 Meter / Roll |

CCT: RGB
IP65, CRI 80Ra, Ambient
Temperature: 0 to +45 °C

## LED Strip Light STRIP 102

- 6W/M, 50M Per Roll, 240V AC
- High Luminous Efficacy, Rated lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Cutting Length | Dimension |
|---|---|---|---|
| FESTR6WM102A | 6W/M | 1000mm | 50 Meter / Roll |

CCT: 3000K
IP65, CRI 80Ra, Ambient
Temperature: 0 to +45 °C

## LED Strip Light STRIP 103

- 5W/M, 5M Per Roll, 24V DC
- High Luminous Efficacy, Rated lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Cutting Length | Dimension |
|---|---|---|---|
| FESTR5WM103A | 5W/M | 50mm | 5 Meter / Roll |

CCT: 3000K/6500K
IP20, CRI 80Ra, Ambient
Temperature: 0 to +45 °C



## LED Strip Light STRIP 104

- 5W/M, 5M Per Roll, 24V DC
- High Luminous Efficacy, Rated lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Cutting Length | Dimension |
|---|---|---|---|
| FESTR5WM104A | 5W/M | 50mm | 5 Meter / Roll |

CCT: 3000K/6500K
IP44, CRI 80Ra, Ambient
Temperature: 0 to +45 °C

CCT: 4000K/6500K
IP20, CRI 80Ra, Ambient
Temperature: 0 to +45 °C

## ECO Batten Essential T8

- Suitable for T8 Tubes
- Rated lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Dimension |
|---|---|
| FEBTT8-01 | 1x4 ft |
| FEBTT8-02 | 2x4 ft |

CCT: 3000K/4000K/6500K
IP20, CRI 80Ra, Ambient
Temperature: 0 to +45 °C

## ECO Batten T5

- Aluminum + PC, with Switch, Linkable
- Rated lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FEBTT5-06 | 6W | 100 | 600 | 300x23x33 |
| FEBTT5-09 | 9W | 100 | 900 | 565x23x33 |
| FEBTT5-18 | 18W | 100 | 1800 | 1180x23x33 |

CCT: 6500K
IP20, CRI 80Ra, Ambient
Temperature: 0 to +45°C

## Batten Light, ECO T12

- Aluminum Body, Opal PC Diffuser, ABS Endcaps
- High Luminous Efficacy, Rated Lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FEBT40WT12A | 40W | 90 | 3600 | 1195x60x29 |

CCT: 6500K
IP20, CRI 80Ra, Ambient
Temperature: 0 to +45°C

## Batten Light, ECO T36

- Aluminum Body, Opal PC Diffuser, PC  Endcaps
- High Luminous Efficacy, Rated lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FEBT40WT36A | 40W | 90 | 3600 | 1185x68x40 |

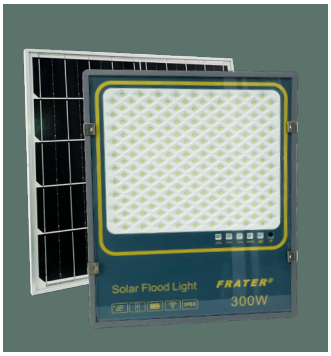


CCT: 6500K
IP65, CRI 80Ra, Ambient
Temperature: -20 to+50 °C

## Solar Flood Light, Star Series

• High Performance Thermal Management Design to Ensure Low LED Junction Temperature
• ABS Body, Toughen Glass, Surface Installation
• High Luminous Efficacy, Rated lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FEFLSO20WSTAR | 300W | 100 | 2000 | 350x29x43 |

CCT: 6500K
IP65, CRI 70Ra, Ambient
Temperature: 0 to +50 °C

## Solar Street Light, Venus Series

• High performance thermal management design ensuring low LED junction temperature
• High brightness, stable performance and long life span
• Anti rusting sturdy stainless steel screws
• Daylight ON-OFF Sensor
• High Luminous Efficacy, Rated lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FESTVS-050 | 50W | 100 | 1500 | 650x330x140 |
| FESTVS-080 | 80W | 100 | 3000 | 850x350x160 |

CCT: 6500K
IP65, CRI 80Ra, Ambient
Temperature: -20 to +50 °C
Charging Hours: 6-8 hours
Working Hours> 10 hours

## Solar Outdoor Wall Light, Owl I

- Innovative design with sensor
- Adjustable °130 of the eyeballs
- Multiple working mode
- Rated lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FEWLSO1WOWLI | 1W | 40 | 40 | 116x58x116 |

CCT: 6500K
IP65, CRI 80Ra, Ambient
Temperature: -20 to +50 °C
Charging Hours: 6-8 hours
Working Hours> 10 hours

## Solar Outdoor Wall Light, Owl II, Owl III

- Innovative design with sensor
- Adjustable °130 of the eyeballs
- Rated lifetime: 20,000 hours

**PRODUCT VARIANTS**

| Model# | Wattage | Efficacy | Lumen | Dimension |
|---|---|---|---|---|
| FESPSO1WOWLII | 1W | 90 | 90 | 104x61x169 |
| CCT: 6500K | | | | Multiple working mode: High/Low/Breathing/Off |
| FESPSO1WOWLIII | 1W | 90 | 90 | 104x61x155 |
| CCT: RGB | | | | Multiple working mode:Red/yellow/green/purple/blue/cyan/white/magic color switching mode |

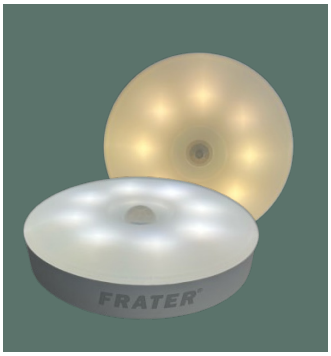


CCT: 3000K, 6500K
IP20, CRI 80Ra, Ambient
Charging Hours: 1hour
Working Hours > 5 hours

## Motion Sensor Night Light

- Human body Sensing
- IR Sensor
- Automatic sleep Magnetic
- Magnetic adsorption
- Switch two-color model

**PRODUCT VARIANTS**

| Model# | Wattage |
|---|---|
| FENLQI | 1W |

WHERE
THERE IS
DARKNESS
LET THERE
BE LIGHT

FRATER®

SPAIN SINCE 1999

ECO

AW rostamani Lumina

Fraterbyawr

056 4189 871

fraterlighting.com